

FIXING CLIP

VS

FLASHING CLIP

Replaces traditional lead wedges, saving you time and money

KEY BENEFITS

Replaces traditional lead wedges, saving you time and money

Will secure any flashing chase from **6mm - 18mm**

RECOMMENDED USE

Will secure any flashing chase from **16mm - 26mm**

Minimum of one fixing clip per 1/2 linear meter of flashing (or as needed depending on the particular job)

RECOMMENDED USE

Minimum of one flashing clip per 1/2 linear meter of flashing (or as needed depending on the particular job)

Minimum of **1 fixing clip** per step

RECOMMENDED USE

Minimum of **1 flashing clip** per step or as needed depending on size of stone

Box of **20 bags** of 20 clips


Box of **10 bags** of 50 clips

AVAILABLE IN

Bag of **25 clips**


HOW TO APPLY THE FIXING OR FLASHING CLIP

1

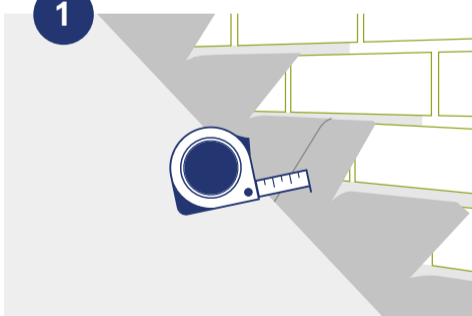


Measure the chase joint. For smaller joint up to 18mm use the fixing clip. For larger joints from 16mm – 26mm use the flashing clip

3

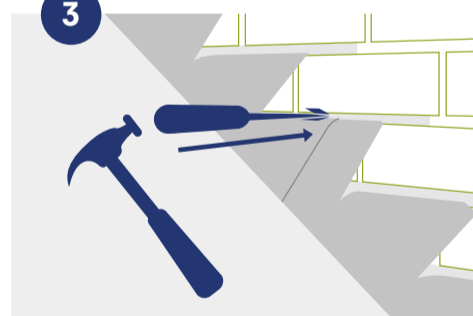


Dress the clip into place

2

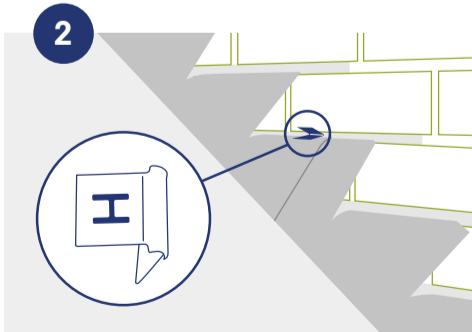

Insert the clip in the chase with the 'H' or 'H+' uppermost

4

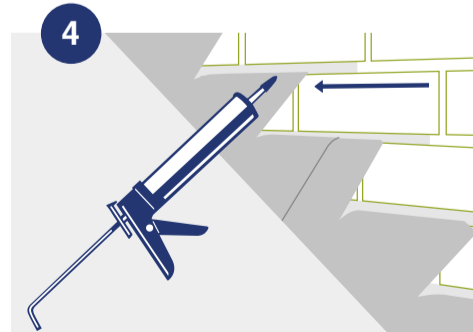

Use lead sealant to point the flashing and give it a professional finish