


MAKE SURE YOUR ROOFING PROJECT GETS A **PROFESSIONAL FINISH**

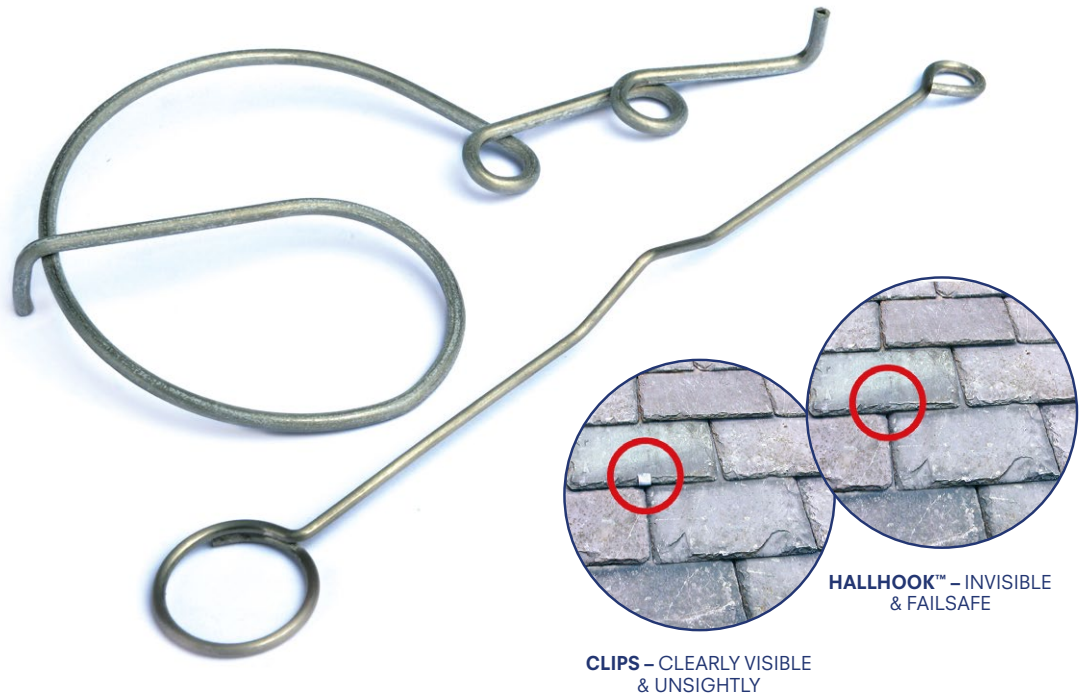

HALLHOOK™, THE QUICK, FAIL SAFE SOLUTION FOR REPLACING BROKEN SLATES

Hallhook is a fail safe, permanent, and hidden device that is recommended when replacing broken slates. Invented by Jimmy Hall – an established slater and tiler with 45 years' experience working in the roofing industry – he couldn't stand to see a beautiful slate roof spoiled by unsightly lead or copper straps. Other fixings didn't come up to scratch so he designed the Hallhook – the simple, effective and time-saving solution.

WHEN TO USE

- General damage repair.
- After installation of slate vents.
- After mounting of solar panel brackets.
- After installation of roof lights/windows.

BENEFITS

Unlike other roofing repair solutions such as silicone, lead and copper straps or plastic products, the Hallhook is durable, strong and undetectable on the finished roof. It is quick and easy to fix, providing the professional finish your customers will value.

HOW TO USE A HALLHOOK

There are 4 easy steps to follow when using a Hallhook to replace a broken slate:

- Remove the broken slate.
- Position the Hallhook between the slates, so that the bottom hook is 10mm above the finished slate baseline, and fix with a nail. Then hang the 'hook pull' onto the Hallhook.
- Slide a new slate into place. Then gently pull the 'hook pull' until the Hallhook hooks the base of the slate.
- Finally, remove the 'hook pull'.